




LISTED

E209344

SAFE-T-SWITCH® MODEL SS1

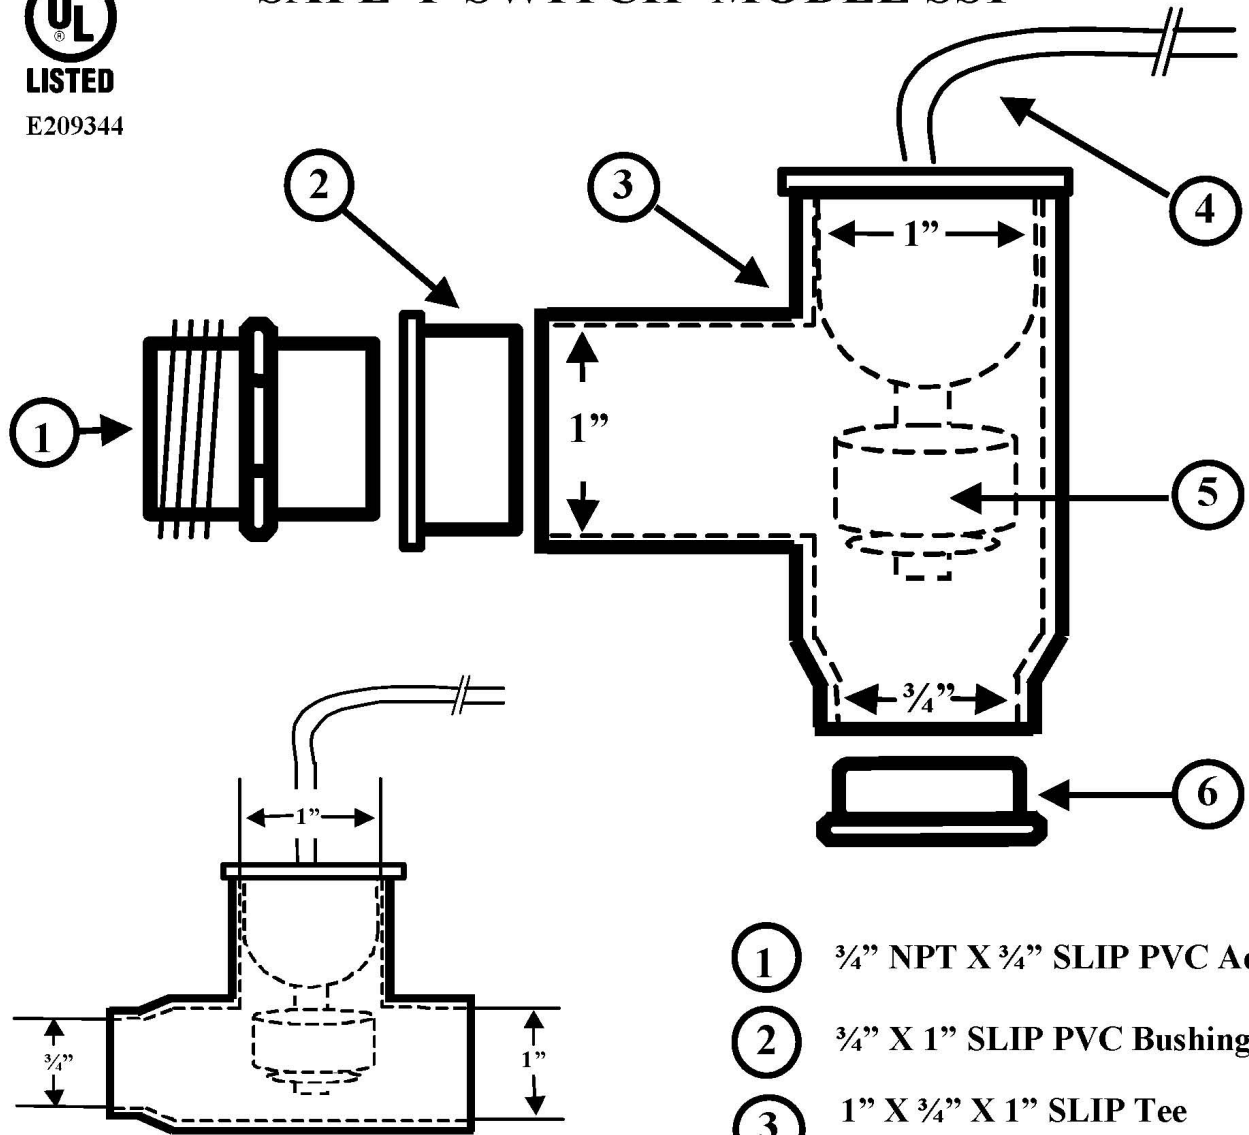

HORIZONTAL APPLICATION

- ① 3/4" NPT X 3/4" SLIP PVC Adaptor
- ② 3/4" X 1" SLIP PVC Bushing
- ③ 1" X 3/4" X 1" SLIP Tee (Schedule 40 / PVC 1)
- ④ 72"-Inch, 18AWG Cables (Prewired/Potted)
- ⑤ Electrically Potted Switch/Cap Assembly
- ⑥ 3/4" SLIP Plug for Close Coupled Applications

RECTORSEAL
 2601 Spenwick Dr
 Houston, TX 77055
 800-231-3345 www.rectorseal.com

PART NAME:
MODEL SS1 3/4" INLINE A/C CONDENSATE DRAIN OVERFLOW KIT

	SCALE: NONE	DRAWN BY:	DATE: 8/8/16
	DRAWING #: SS1	APPROVED BY:	REVISION: B

REQUIREMENTS:

- Potted, water sealed reed/magnet switch design.
- UL 508 compliant.
- Schedule 40 PVC1 plastic components
- Carry Capacity 1.25 Amp